




BRIEF INFORMATION

Black Magic Lightbars

- → Full blackout appearance including black brackets
- → Sleek design
- → Temperature Control System
- → Intense Light output

PRODUCT FEATURES



The HELLA Black Magic Lightbars offer driving beams with very powerful lightoutput up to 15,000 lumen, ideal for off-road situations where you need this the most. They have a recognizable and attractive full blackout appearance, slim and edgeless design. Typical applications would be installations as Hood, Bumper, Ground Bumper and Roof Lightbars.

The product scored the highest dust / waterproof rating and the edgeless design prevents dust deposits from settling along edges. The extra long cable (2 m) allows easy mounting on your vehicle. The Black Magic Lightbars have an integrated thermal sensor that adapts to the ambient temperature. This new feature not only prevents overheating or LED failure, but also increases light output when the ambient temperature is low. In this way the user is given the optimum light under all conditions.

TECHNICAL DETAILS


















| Version . | LED Slim Lightbar | | | | LED Double Lightbar |
|-------------------------------|---|---|--|---|---|
| | 20″ | 32″ | 40 ″ | 50″ | 21.5″ |
| Rated voltage | | | Multi-voltage | | |
| Operating voltage | | | 10-30 V | | |
| Current consumption | 5.7-8 A (12 V) 2.8-3.9 A (24 V) | 8.9 – 12.5 A (12 V) 4.2 – 6.1 A (24 V) | 10.1 – 14.9 A (12 V) 4.9 – 7.8 A (24 V) | 11.8-19.2 A (12 V) 5.6-10.1 A (24 V) | 6.7 – 14.6 A (12 V) 3.5 – 7.2 A (24 V) |
| Power consumption | 105 W | 165 W | 210 W | 270 W | 200 W |
| Light function | Spot (offroad only) | | | | |
| Light source | LED | | | | |
| Colour temperature | 5,700 Kelvin | | | | |
| Material | Aluminium, black stainless steel bracket | | | | |
| Weight | 1,400 g | 1,780 g | 2,400 g | 3,000 g | 2,420 g |
| Protection class | IP 68, IP 69K | | | | |
| EMC protection | ECE-R10 | | | | |
| Mounting | Upright / pendant | | | | |
| Connection | 2,000 mm cable with open ends | | | | |
| Amount of LEDs | 21 | 33 | 42 | 54 | 40 |
| Light performance (effective) | max. 6,000 lm | max. 9,000 lm | max. 12,000 lm | max. 15,000 lm | max. 11,000 lm |
| Application | For offroad vehicles such as 4x4's, SUV's, Pick-ups, Trucks, Buggy's, Quads | | | | |


Technical drawing

Black Magic Lightbar 20" (Slim)






Black Magic Lightbar 32" (Slim)






Black Magic Lightbar 40" (Slim)






Black Magic Lightbar 50" (Slim)






Black Magic Lightbar 21.5" (Double)





ILLUMINATION

The light distribution charts show the ranges of two lights.

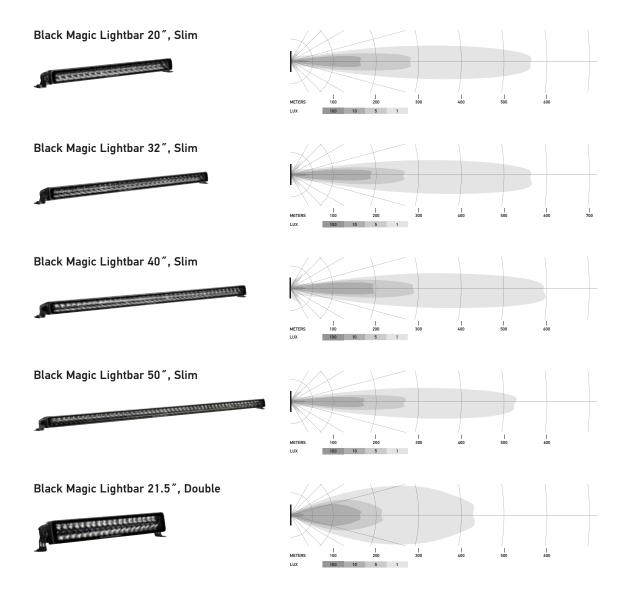

APPLICATION EXAMPLES



Illumination shown in photo made by one: 1 x 40 " Black Magic Slim Lightbar (Hood mount)

PROGRAM OVERVIEW

| Scope of delivery | Description | Part number |
|-------------------|---|-----------------|
| | LED Slim Lightbar 20" Includes: (1) LED spotlight, (1) mounting hardware, (1) mounting instructions | 1FJ 358 176-301 |
| | LED Slim Lightbar 32" Includes: (1) LED spotlight, (1) mounting hardware, (1) mounting instructions | 1FJ 358 176-311 |
| | LED Slim Lightbar 40 " Includes: (1) LED spotlight, (1) mounting hardware, (1) mounting instructions | 1FJ 358 176-321 |
| | LED Slim Lightbar 50 " Includes: (1) LED spotlight, (1) mounting hardware, (1) mounting instructions | 1FJ 358 176-331 |
| | LED Double Lightbar 21.5" Includes: (1) LED spotlight, (1) mounting hardware, (1) mounting instructions | 1FJ 358 176-401 |

ACCESSORIES

| Scope of delivery | Description | Part number |
|-------------------|--|-----------------|
| | Slim Lightbar Back Side Mounting Bracket + screws set (2 pcs), recommended to be used for extra support for 40" and 50" Lightbar | 8HG 358 176-341 |